


Benefits

Thin Film Solar Modules

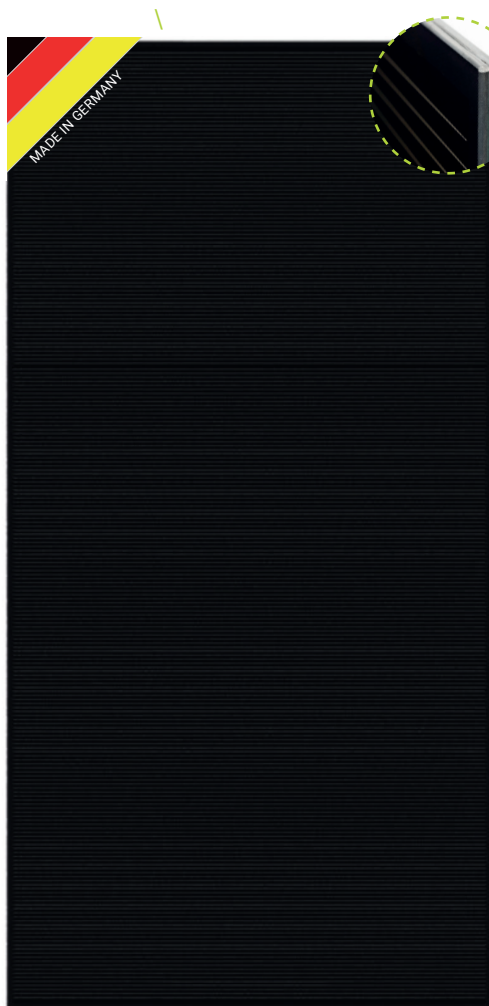

HIGH ENERGY YIELD (KWH/KWP)

- better performance than crystalline silicon at low light and high temperatures

POSITIVE OUTPUT TOLERANCE (+2,5/-0 W)

- better field performance
- risk of reduced output is eliminated

BLACK DESIGN EDGE SEAL

- reliable moisture and vapor barrier
- absolute insulation resistance through precise laser edge ablation
- aesthetic, homogenous appearance through the use of high-grade edge sealing material

MADE AND DEVELOPED IN GERMANY

- reduced manufacturing costs while at the same time increased product quality
- further development of technology and reliability from renowned institutions

MODULE FORMAT

- 1200 x 600mm
- light weight 12kg module
- outstanding use of space owing to the small module format
- easy to handle & installation >> one person

CERTIFIED AND TESTED ACCORDING TO NEWEST STANDARDS

IEC 61215 & IEC 61730
 UL 1703 3rd-Edition
 IEC 61701 Salt mist test
 PID @-600V
 Fire Rating A/B



Certificate No.
40045463



CALYXO CO₂ - CARBON FOOTPRINT

- most eco-efficient in the entire solar sector
- clean energy - at the lowest cost - with the least impact on our environment.

MODULE WARRANTY



Power Output Warranty

on 90% of rated power in the first 10 years
 on 80% over 25 years



Product Warranty


on material and workmanship



Residential



Roof Top



BIPV



Repowering



Ground Mounted

MODULE DESCRIPTION

CX-Series

Cell Type	Cadmium telluride
Length	1200 mm
Width	600 mm
Weight	12.0 kg
Thickness	6.8 mm
Area	0.72 m ²
Cable diameter	2.5 mm ²
Plus pole	650 mm
Minus pole	850 mm
Junction box	IP65
Bypass Diode	none
Front Glass	3.2 mm
Back glass	3.0 mm
Encapsulation	none EVA
Frame	none
Laod Rate	2400 Pa
Safety Class	II
Fire Rating	C

ELECTRICAL CHARACTERISTICS

Performance at Standard Test Conditions (STC: 1000 W/m², 25°C, AM 1.5 SPECTRUM)

POWER CLASS	CX-Series	CX1	CX3	CX3pro /2
Nominal Power [+10% / -5%]	P _{MPP} [W]	70.0 - 80.0	72.5 - 87.5	80.0 - 90.0
Current at max. Power	I _{MPP} [A]	1.17 - 1.23	1,70 - 2.20	1.87 - 1,97
Voltage at max. Power	V _{MPP} [V]	60.5 - 65.1	37.0 - 51.0	43.5 - 46.4
Short Circuit Current	I _{SC} [A]	1.35 - 1.41	1.90 - 2.30	2.13 - 2.19
Open Circuit Voltage	V _{OC} [V]	85.8 - 89.1	53.0 - 64.0	56.7 - 58.6
Maximum System Voltage	V _{SYS} [V]		1000	
Maximum Reverse Current	I _R [A]	2.00	4.00	3.50
Connector	I _{CF} [A]	MC3	Y-Sol4	MC4

Normal Module Operating Temperature (NMOT: 800 W/m², 45 ±2°C, AM 1.5 Spectrum)

POWER CLASS	CX-Series	CX1	CX3	CX3pro /2
Nominal Power	P _{MPP} [W]	54.0 - 62.0	56.0 - 68.0	62.0 - 70.0
Current at max. Power	I _{MPP} [A]	0.94 - 1.00	1.46 - 1.54	1.50 - 1.60
Voltage at max. Power	V _{MPP} [V]	58.0 - 62.4	39.0 - 44.3	41.7 - 44.5
Short Circuit Current	I _{SC} [A]	1.07 - 1.12	1.72 - 1.75	1.71 - 1.76
Open Circuit Voltage	V _{OC} [V]	82.7 - 86.0	57.0 - 58.5	54.3 - 56.1

Temperature coefficients

Temperature I _{SC}	α	[%/K]	0.03
Temperature V _{OC}	β	[%/K]	-0.21
Temperature P _{MPP}	γ	[%/K]	-0.20
NMOT		[°C]	45 +/-2


CONTACT US:

Ennogie Australia
2/1 Greenwood Place
Freshwater, NSW 2096
Australia

+61 41 281 9139

info@ennogie.com.au

Efficiency advantage in hot climate regions

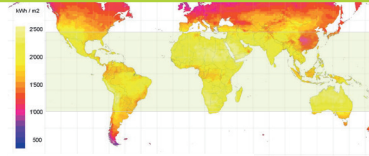

Performance at low irradiance

